


# Infinity

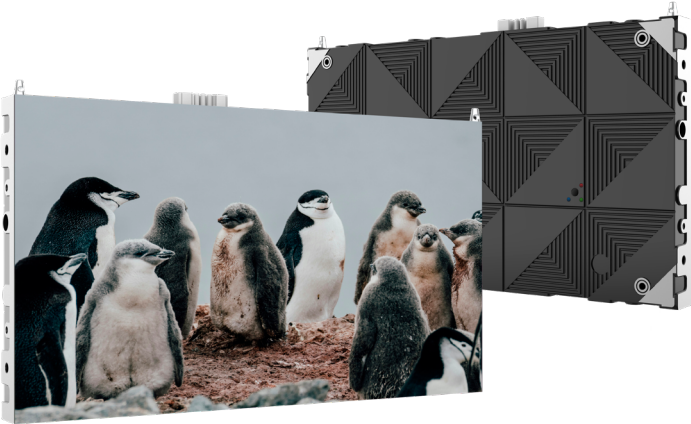

Discover the future of color precision with our Vividly Real Color technology. Our displays deliver stunningly realistic visuals with full coverage in AdobeRGB, REC709, sRGB, and extensive DCI-P3 support. COB technology with epoxy protection ensures exceptional durability, allowing screens to withstand environmental impacts. Additionally, Flip-Chip technology guarantees low power consumption, further enhancing efficiency and performance.

## Specification

	I007	I009	I012	I015	I019
Pixel pitch (mm)	0.79	0.95	1.26	1.583	1.9
LED type	COB				
Cabinet Resolution (WxH)	768x432	640x360	480x270	384x216	320x180
Cabinet size (WxHxD, mm)	608 x 342 x 49 (27.5")				
Aspect ratio	16:9				
Net.weight/cabinet	7.0 kg				
Cabinet material	Die-casting aluminium				
Maintenance	Front				
IP Rating	Front IP40 / Rear IP30				
Driving Method	1/54	1/45	1/36	1/36	1/30
Brightness (cd/m2)	800				
Contrast ratio	20,000:1				
Refresh rate	≤ 3,840 Hz				
Color processing	16 bits				
Viewing angle (H/V)	160° / 160°				
Color temperature (K)	3,000-9,500				
Dimming Level	256				
Max./Avg. power consumption ( W per m2)	335 / 169	289 / 135	337 / 192		312 / 154
Power supply	AC100-240V, 50/60 Hz				
Operating temperature	-20°C to 40°C				
Operating humidity	10 to 80 %				
Led lifetime	100,000 hrs				
Certificates	CE; ETL; FCC Class A; Rohs				

## Transtech global

This document is © 2024 Transtech EMEA GmbH. All rights reserved. All hardware and software names are trademarks and/or registered trademarks of their respective owners. Specifications are subject to change without notice. Errors and omissions excepted



**TRANSTECH**  
www.trtled.com  
info@trtled.com